


**FEATURES:**


- Blow-out Proof Stem
- Pressure Balance Hole in Ball Slot
- Double Reduced Port
- Various Thread Standards Available
- Locking Device is Available Upon Request
- Casting Approved by TÜV AD 2000 - Merkblatt W0

**STANDARDS:**

- Design : ASME B16.34, MSS SP-110
- Wall Thickness : EN 12516 - 3
- Pipe Thread : ASME B1.20.1, BS21  
DIN 2999 / 259, ISO 228 / 1  
JIS B0203, ISO 7 / 1
- Inspection & Testing : MSS SP-110, EN 12266

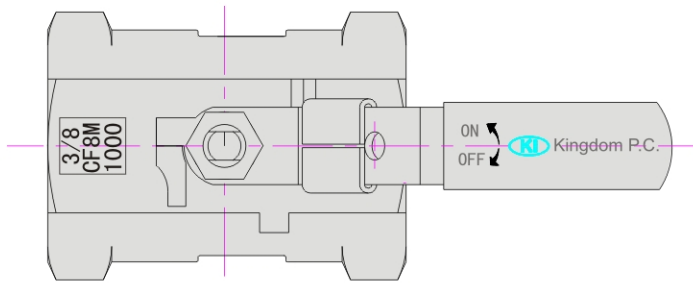

NO.	PART NAME	MATERIALS		
1	Body	CF8M	CF8	WCB
2	End Plug	CF8M	CF8	WCB
3	Ball Seat	PTFE		
4	Ball	CF8M	CF8	
5	Body Gasket	PTFE		
6	Thrust Washer	PTFE		
7	Stem Packing	PTFE		
8	Gland Nut	SUS 304		
9	Stem Washer	SUS 304		
10	Stem Nut	A194 - 8		
11	Stem	SUS 316	SUS 304	
12	Handle Sleeve	Vinyl Plastic		
13	Handle	SUS 304		

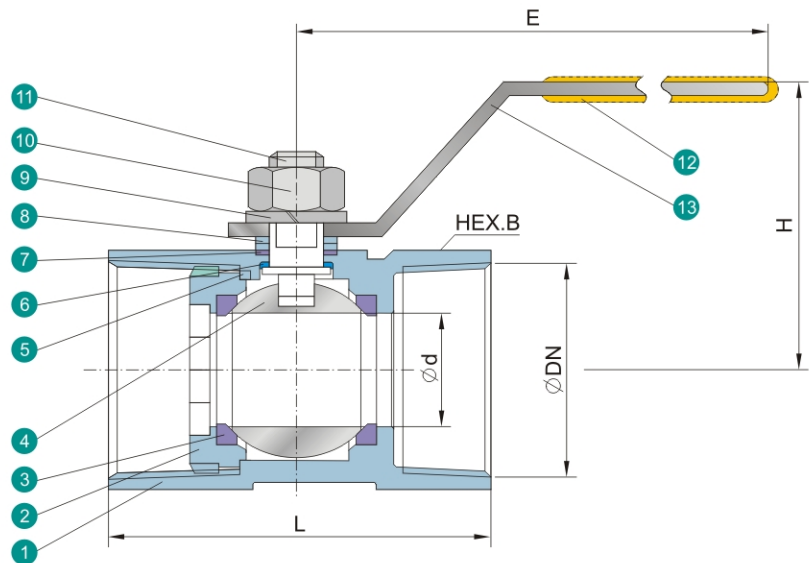

Unit: mm

SIZE	φd	L	H	E	HEX.B	φDN
1/4"	5.0	41.5	34	70	17	NPT
3/8"	7.0	46.0	35	80	21	BSP
1/2"	9.1	58.0	44	92	25	PT
3/4"	12.5	61.0	46	92	32	DIN
1"	15.0	73.5	51	115	38	etc...
1-1/4"	20.0	78.0	58	115	48	
1-1/2"	25.0	85.0	66	127	53	
2"	32.0	102.0	72	127	66	